


MACHOS PARA ROSCAR A MANO

NPS (M)


- **Ejecución:** HSS.
- Macho unitario.
- Rosca AMERICANA.
- Rosca cilíndrica no estanca.

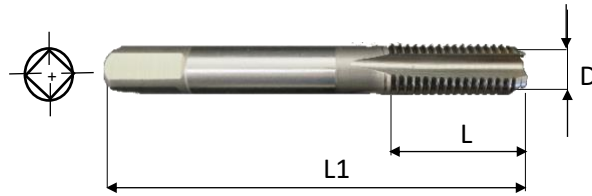

151070

Unid:mm

HSS




CÓDIGO	ROSCA-HILOS	D	L	L1	☒	TALADRADO
0627	NPS 1/8-27h	10,20	18	63	5,5	8,90
1418	NPS 1/4-18h	13,60	20	70	9,0	11,70
1818	NPS 3/8-18h	17,00	20	70	9,0	15,00
2214	NPS 1/2-14h	21,20	22	80	12,0	18,60
3014	NPS 3/4-14h	26,55	22	90	16,0	24,00
3411	NPS 1-11,5h	33,20	25	100	20,0	30,00

MACHOS PARA ROSCAR A MANO

NPSF


- **Ejecución:** HSS.
- Macho unitario.
- Rosca AMERICANA.
- Rosca cilíndrica estanca.

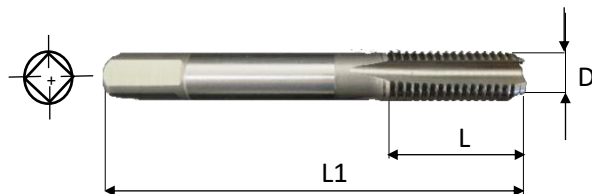

151071

Unid:mm

HSS



CÓDIGO	ROSCA-HILOS	D	L	L1	☒	TALADRADO
0627	NPSF 1/8-27h	10,05	18	63	5,5	8,75
1418	NPSF 1/4-18h	13,35	20	70	9,0	11,30
1818	NPSF 3/8-18h	16,78	20	70	9,0	14,70
2214	NPSF 1/2-14h	20,87	22	80	12,0	18,20
3014	NPSF 3/4-14h	26,23	22	90	16,0	23,50

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325	HRc30~45	HRc 45 ~55	HRc 55~							

- Consulten plazo de entrega.

⊙ : Excelente

○ : Bueno