


## MACHOS PARA ROSCAR A MANO

# PG

- Ejecución: HSS, DIN 40430.
- Macho unitario.

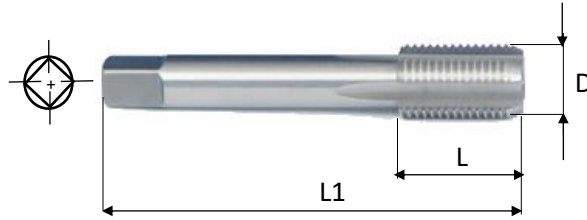


### 151076

Unid:mm

HSS

DIN  
40430




CÓDIGO	ROSCA-HILO	D	L	L1	☑	TALADRADO
0720	Pg 7-20h	12,5	20	70	7,0	11,50
0918	Pg 9-18h	15,2	20	70	9,0	14,00
1118	Pg 11-18h	18,6	22	80	11,0	17,25
1318	Pg 13,5-18h	20,4	22	80	12,0	19,00
1618	Pg 16-18h	22,5	22	80	14,5	21,25
2116	Pg 21-16h	28,3	22	90	18,0	27,00
2916	Pg 29-16h	37,0	25	100	22,0	35,50
3616	Pg 36-16h	47,0	32	140	29,0	45,50
4216	Pg 42-16h	54,0	36	140	32,0	52,50
4816	Pg 48-16h	59,3	36	160	35,0	58,00

## JUEGO DE MACHOS PARA ROSCAR A MANO

# BA

- Ejecución: HSS, DIN 352.
- Juego de 3 machos.

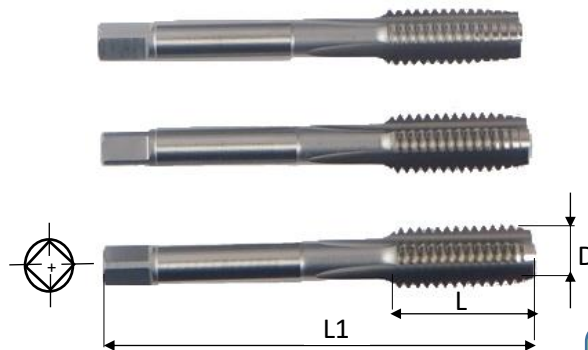


### 151077

Unid:mm

HSS

DIN  
352



CÓDIGO	ROSCA-PASO	D	L	L1	☑	TALADRADO
0000	BA-0 x 1,00	6,0	18	50	4,9	5,10
0100	BA-1 x 0,90	5,3	18	50	4,9	4,50
0200	BA-2 x 0,81	4,7	17	50	4,9	4,00
0300	BA-3 x 0,73	4,1	14	45	3,4	3,40
0400	BA-4 x 0,66	3,6	14	45	3,0	3,00
0500	BA-5 x 0,59	3,2	14	45	3,0	2,60
0600	BA-6 x 0,53	2,8	12	40	2,7	2,30
0700	BA-7 x 0,48	2,5	10	40	2,1	2,00
0800	BA-8 x 0,43	2,2	10	36	2,1	1,80

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325	HRc30~45	HRc 45 ~55	HRc 55~							

- Consulten plazo de entrega.

⊙ : Excelente

○ : Bueno